

LifePoint™ Duo

Meets OSHA Requirements

1926.502(15) and (16)



The LifePoint™ Duo is the perfect solution for 2 people fall protection when circumstances require non-penetrating versatility. LifePoint™ provides the answer with an easy to set up and quick-move solution.

Non-Penetrating Versatility:

Protect workers AND maintain rooftop water integrity with LifePoint Duo. No claws or projectiles to damage the roof surface. The simple weight box design provides OSHA compliance with minimum components to maintain or inspect.

2 Anchorage Capability:

LifePoint™ Duo provides fall protection anchor points for the following:

- (1) person fall restraint and
- (1) person fall arrest OR (2) person fall restraint

Mobility:

LifePoint™ Duo can be repositioned in a few minutes by one person. With the patented pivoting frame design, by moving the handle to the transport position, the weight box is lifted and can be easily wheeled to the next location. Then simply move the handle to the work position, the weight box is lowered and the wheels are raised.

Built to Last:

With galvanized and powder coated corrosion resistant components and few moving parts, LifePoint™ will perform for years.



Tie off points for Fall Arrest

Why Choose Garlock?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- 100+ Years of Industry Experience
- Full Passive Fall Protection Portfolio
- Custom Engineered Products Available




Lifepoint Duo Features



Move LifePoint™ Duo handle into travel position. Move unit into position.



Press handle release and lower weights into working position.

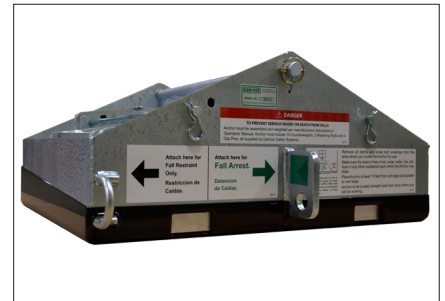

Connect lanyard to either fall-restraint or Fall-Arrest.



Handle release.



Cast weights or cans available.



Flat-free rubber tires.

Specifications

Description	Specifications
Empty weight	200 lbs.
Loaded weight	930 lbs.
Dimensions with handle retracted	70"= (L), 28"= (W), 20"= (H)
Dimensions with handle extended	190"= (L), 28"= (W), 42"= (H)
Tires	Flat Free Solid

Due to continuous improvement, specifications are subject to change without notice.



P : 877.791.4446
 E : info@garlocksafety.com
 GARLOCKSAFETY.COM

Address:
 2601 Niagara Ln N.
 Plymouth, MN 55447