

Spray Melter / Applicator

- Plaza Decks
- Rooftops
- Transportation/Tunneling
- Foundation Walls
- Green Roofs/Gardens
- Leak Repair



Spray Applied Process: Save time material and labor costs and complete projects up to 4 times faster versus other methods using the Garlock Spray-Applied waterproofing system.


Low Temperature Application: Work more safely by spraying material at temperatures below 260 degrees or less which is classified as Cold-applied in most regions. Eliminates compliance with regulations normally associated with Hot-Applied membranes.

Productivity: Spray longer without stopping to add product with the 410 gallon large capacity GSX spray applicator.

Rugged Design: Experience long term performance, lower cost of ownership and operation with the GSX heavy duty design and construction, engineered for the rugged job ahead.

Diesel Heat and Digital Control: For maximum safety and fuel efficiency, all GSX applicators utilize a fully enclosed chamber diesel heat system. The unique Double boiler design is oil jacketed for indirect heating. Keep product at the precise temperature for application with the on-board digital system with automatic control of application and melter temperatures.



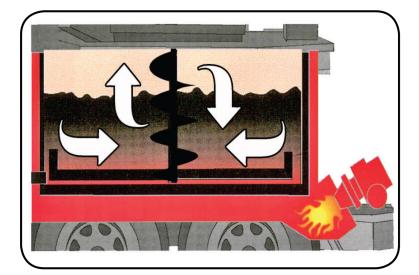

High-Performance Mixing- Eliminate temperature stratification with the specially designed Auger/ Agitator. Unobstructed Internal Machine Recirculation ensures unsurpassed heat up and recovery times. Reduce downtime with the heavy-duty pumping system.




Easy replacement of spray tips.







Digital Temperature Control



Optional Engine Cover

SPECIFICATIONS

| | 150GSX | 230GSX | 410GSX |
|---------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Material Capacity US Gallons (liters) | 150 (568) | 230 (871) | 410 (1552) |
| Heating Method | Diesel | Diesel | Diesel |
| Diesel Engine (HP) | 25 | 25 | 25 |
| Fuel Capacity gal. (liters) | 33(125) | 33 (125) | 33 (125) |
| Dimensions L x W x H in. mm | 170 x 84 x 92 4318 x 2134 x 2337 | 165 x 87 x 90 4191 x 2210 x 2286 | 185 x 90 x 90 4698 x 2286 x 2286 |
| Shipping Weight Ibs. (kg) | 4,120 (1,869) | 4,540(2050) | 5,420 (2459) |
| Warranty | One Year | | |

Due to continuous improvement, specifications are subject to change without notice.



Philadelphia Office

6 Poulson Ave P.O. Box 156 Essington, PA 19029 Phone: 610-521-3404

Fax: 610-521-4717

Harrisburg Office

7917 Derry St Suite 106 Harrisburg, PA 17111 Phone: 717-458-5610

Fax: 717-458-5613

Pittsburgh Office

503-5 North Drive Sewickley, PA 15143 Phone: 412-259-8449

Fax: 412-291-3188