
ANSI/SPRI/GT-1 TEST PRESSURES UP TO 136 PSF(VERTICAL), AND 223 PSF (HORIZONTAL)

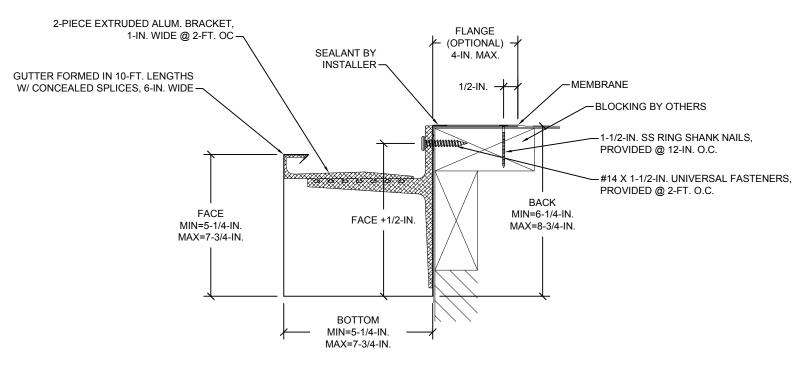

BOTTOM SIZES ARE PROVIDED IN 1/2-IN. INCREMENTS (e.g. 5-1/4-IN., 5-3/4-IN., 6-1/4-IN.,)

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

APPLICATIONS
SINGLE-PLY MEMBRANES
MOD BIT

SIZES:

SEE DRAWING

HOTES.

1-REFER TO ROOF MEMBRANE MANUFACTURER FOR THEIR APPROVED INSTALLATION DETAIL.

2-TESTED IN ACCORDANCE WITH ANSI/SPRI/GT-1.

ANSI/SPRI GT-1 TESTED





