




# Chamfer Face Gutter with Roof Flange.

## ORDER SPECIFICATION FORM

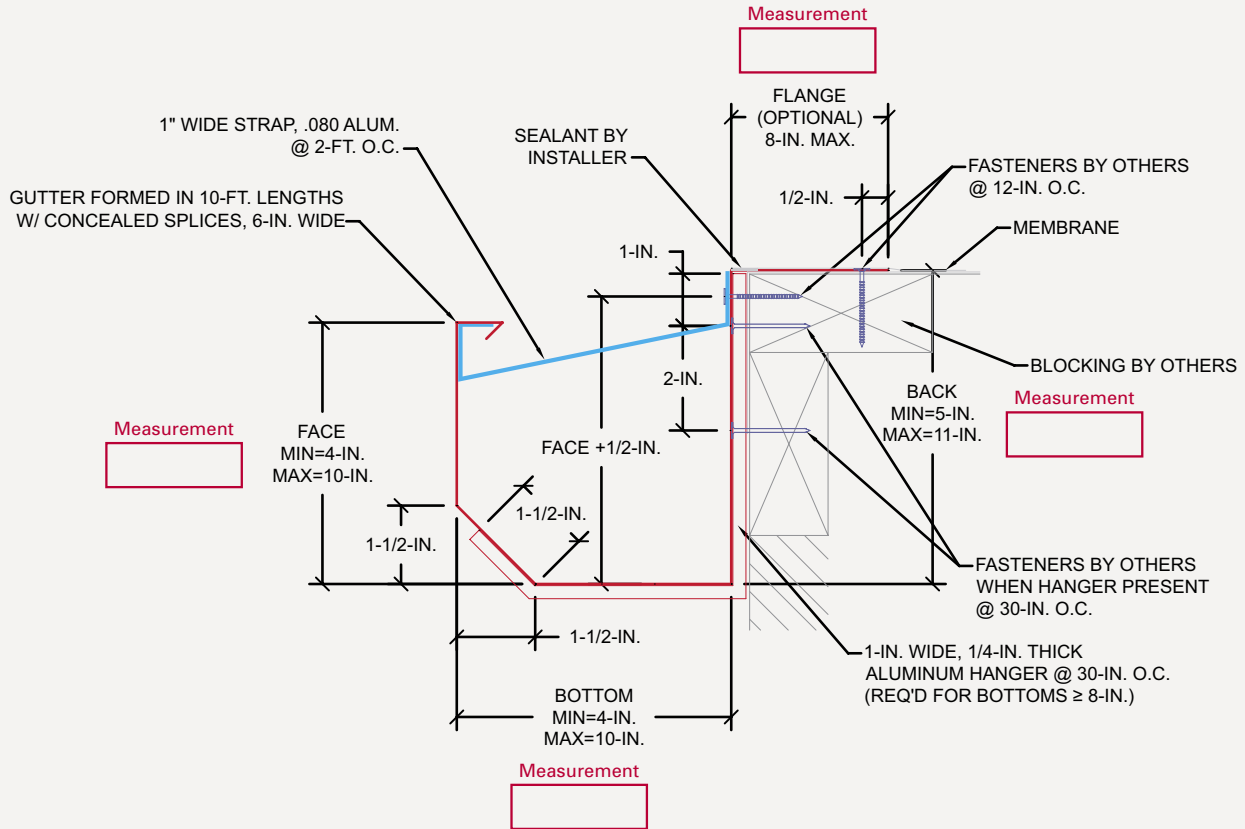

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

QUANTITY	CAP MATERIAL	THICKNESS	ACCESSORY TYPE	CAP FINISH
___ Total LF (10' pcs)	Aluminum	0.040	Welded	Mill Finish
___ Miters (___ Outside, ___ Inside)	Galvanized	0.050	Metal-Lok	Prefinished Kynar
___ End Caps (___ Left, ___ Right)	Stainless Steel	0.063		Post Finished Kynar
___ Expansion Joints (If Required)		0.080	<b>HANGERS</b>	Prefinished Anodized
___ Radius LF (5'-0" pcs)		24 Ga.	Painted	Post Finished Anodized
	<b>COLOR</b>	22 Ga.	Mill	
			None	


<b>APPROVALS:</b> Contact manufacturer for verification of test report data on your project.		<b>CUSTOMER APPROVAL</b> Authorized Customer Signature	
<div style="border: 1px solid black; padding: 5px; display: inline-block;">ANSI/SPRI/GT-1/Tested</div>		Approved for Fabrication Approved with Changes Not Approved	
		_____ Title Date	
Job Name:	Job #:	By:	
Customer:	Project Location:	Date:	
Representative:	Architect:	Sheet	of





# Chamfer Face Gutter with Roof Flange.

## ORDER SPECIFICATION FORM

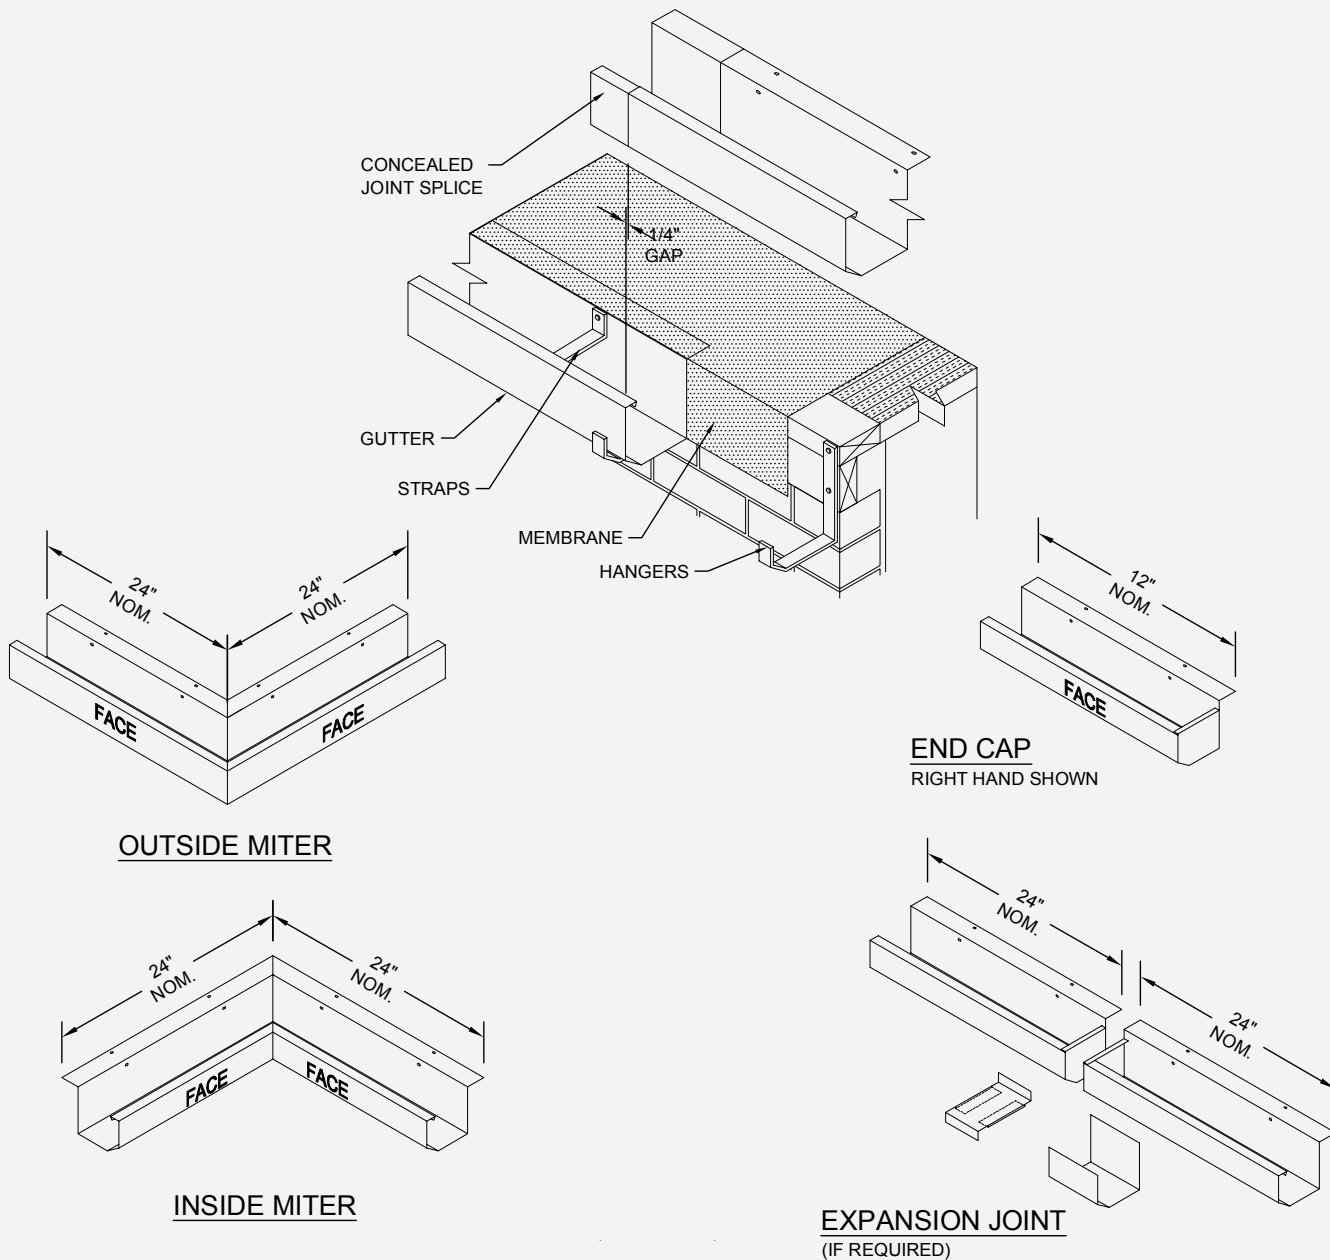

Standard gutter miter leg lengths are 24" Nominal  
 Standard gutter miter angle is 90°  
 For special miter requirements, attach sketches or consult manufacturer for assistance.



## EdgeSystems

4 COMMERCE WAY, ARDEN NC 28704 USA  
 800-892-9173 828-676-1700 [OMGROOFING.COM](http://OMGROOFING.COM)

Copyright © 2020 OMG, Inc. All rights reserved.

Superior productivity.  
 Superior performance.

