
## ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 159 PSF(VERTICAL), AND 91 PSF (HORIZONTAL)

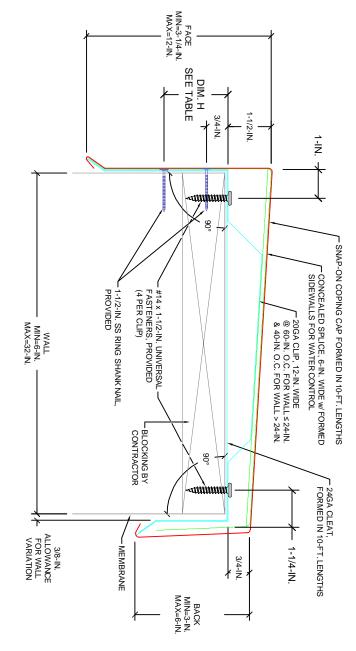

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS
SINGLE—PLY MEMBRANES
MOD BIT
BUR

SIZES:

SEE DRAWING NOTES:

1-REFER TO ROOF MEMBRANE MANUFACTURER FOR THEIR APPROVED INSTALLATION DETAIL.
2-TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED

10-1/2-IN. < FACE ≤ 12-IN.	9-IN. < FACE ≤ 10-1/2-IN.	7-1/2-IN. < FACE ≤ 9-IN.	$4-3/4-IN. \le FACE \le 7-1/2-IN.$	FACE < 4-3/4-IN.	FACE SIZE
6-3/4-IN.	5-1/4-IN.	3-3/4-IN.	2-1/4-IN.	3/4-IN.	DIM. H

