


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 471 PSF (VERTICAL), AND 271 PSF (HORIZONTAL)

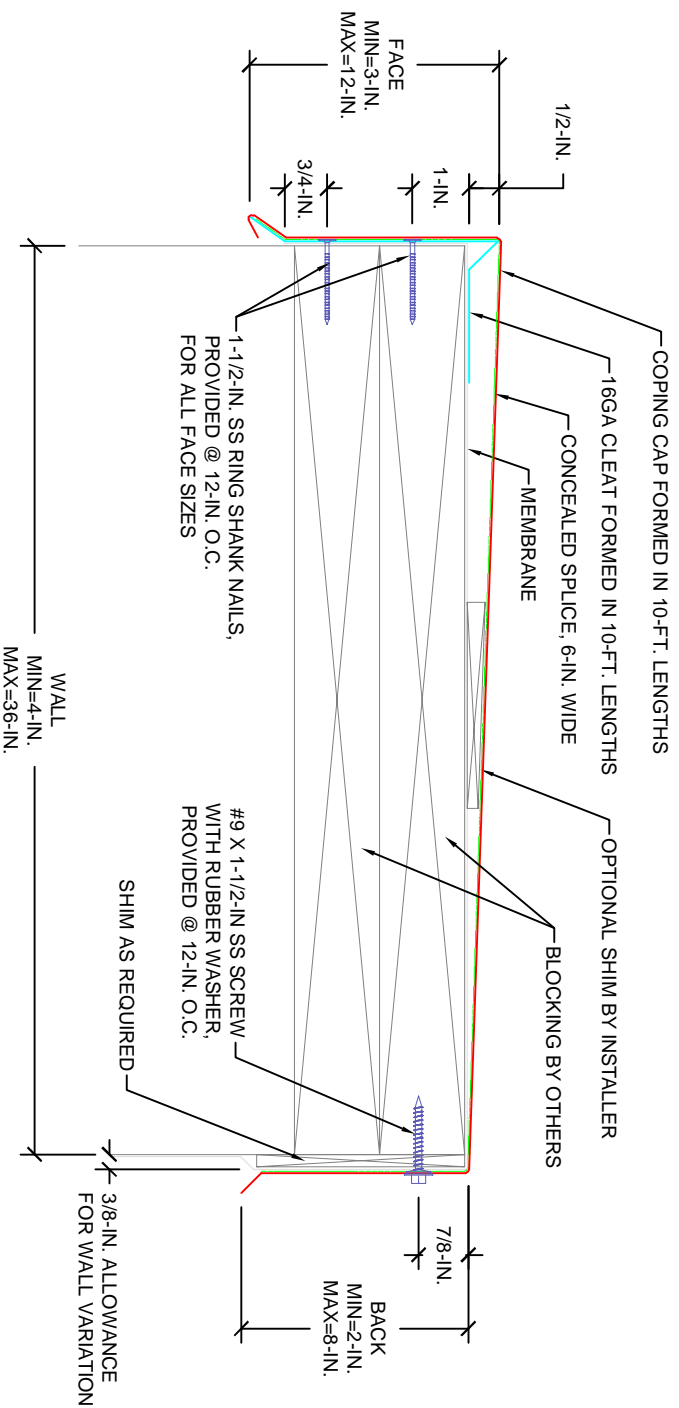

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.
 CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
 ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS
 SINGLE-PLY MEMBRANES
 MODIFIED BITUMEN
 BUR

SIZES:
 SEE DRAWING

NOTES:


1-REFER TO ROOF MEMBRANE MANUFACTURER FOR
 THEIR APPROVED INSTALLATION DETAIL.

2-TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1

ANSI/SPRI/FM4435/ES-1 TESTED



Approved


EdgeSystems
 A Commercial Way
 Roofing
 828-676-1700
 www.omgroofing.cc

MADE	FORNED COPING PLUS
DRWG. BY: P.L.	DATE: 02/21/2020
APPR. BY: K.P.	DATE: 02/21/2020
SCALE	NOT TO SCALE
SHEET	1 OF 1