1-1/2-IN.

ORDER SPECIFICATION FORM

Measurement

COPING CAP FORMED IN 20GA CLIP, 12-IN, WIDE 10-FT. LENGTHS CONCEALED SPLICE -24GA STEEL SPRING, 6-IN. WIDE (REQ'D FOR WALLS > 20-IN. WIDE) WITH FORMED WINGS, 1-5/8-IN. MEMBRANE 1-1/8-IN 26GA STEEL SPRING-6-IN. WIDE BACK FACE MIN=4-IN. MAX=12-IN. MIN=3-IN. MAX=4-IN. 1-1/4-IN. BLOCKING BY OTHERS

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 269 PSF (VERTICAL), AND 155 PSF (HORIZONTAL)

WALL WIDTH MIN= 4-IN. MAX= 24-IN.

#14 X 1-1/2-IN. UNIVERSAL FASTENER,

PROVIDED, 8 PER CLIP

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS FOR UNIVERSAL FASTENERS.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

Clip Spacing = 30-IN. On Center - for face size ≤ 6-IN Clip Spacing = 24-IN. On Center - for face size > 6-IN


8-1/2-IN.


3/8-IN, ALLOWANCE


FOR WALL VARIATION


APPROVALS	COVER MATERIAL	THICKNESS	COVER FINISH
ANSI/SPRI/FM 4435 /ES-1 TESTED APPROVED Florida Product Approval APPROVED APPROVED APPROVED	Aluminum Galvanized Steel	24Ga. 22Ga.	Mill Prefinished Kynar
QUANTITY Attach Sketches of Z- and T- Miters Straight Length Total Miters (Inside:/ Outside:) Total End Caps (Left:/ Right:)	Stainless Steel ACCESSORY TYPE Welded Metal-Lok	.040 in. .050 in. .063 in. .080 in.	Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
	CUSTOMER APPROVAL Approved for Fabrication Approved with Changes Not Approved Authorized Customer Signature		
Radius Radius to Straight Miter Radius End Cap Vault Welded Vault to Straight Miter Welded Vault End Cap Ridge Miter Valley Miter			
	Title Date Job Name:		
COLOR	Project Location:		
	Customer: Representative:		

PermaSnap® Premier Snap-On Coping with Intermittent Clips







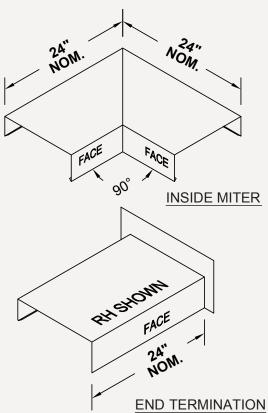



4 COMMERCE WAY, ARDEN NC 28704 USA 800.892.9173 828.676.1700 OMGROOFING.COM

Copyright © 2020 OMG, Inc. All rights reserved.

Superior productivity. Superior performance.





