




PermaSnap® Premier Plus

Snap-On Coping with Intermittent Clips

ORDER SPECIFICATION FORM

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 329 PSF (VERTICAL), AND 190 PSF (HORIZONTAL)

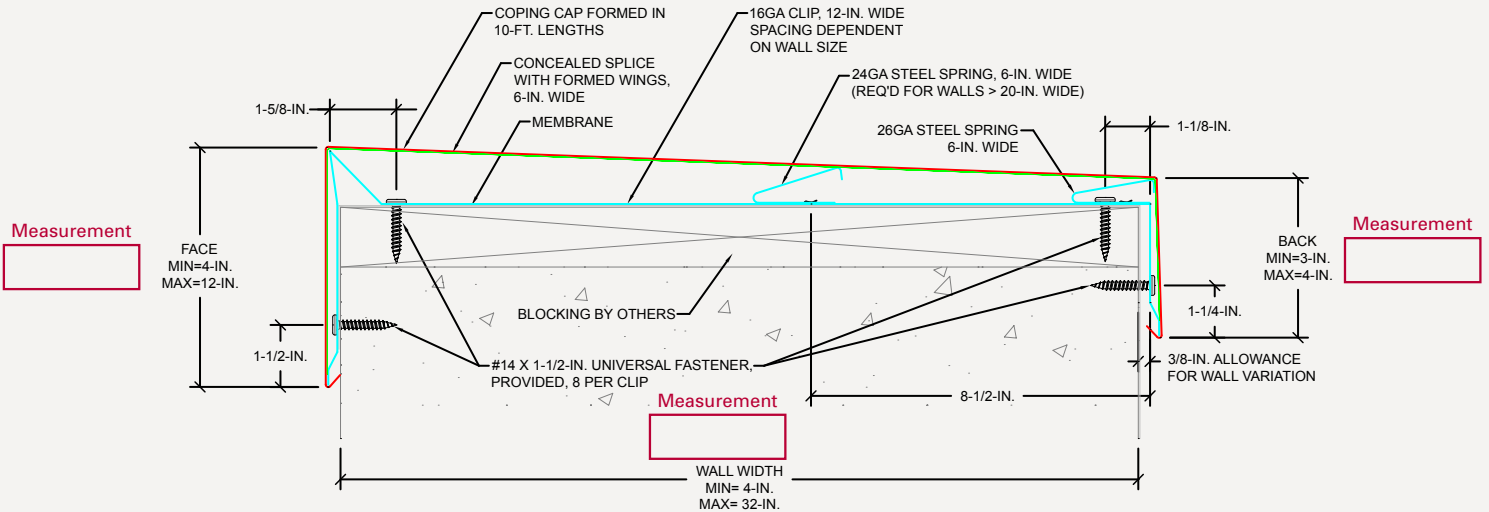

Clip Spacing = 30-IN. On Center - for wall size ≤ 24-IN.
 Clip Spacing = 24-IN. On Center - for wall size > 24-IN.

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS FOR UNIVERSAL FASTENERS.


CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPROVALS		COVER MATERIAL	THICKNESS	COVER FINISH
ANSI/SPRI/FM 4435 /ES-1 TESTED Florida Product Approval 		Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in. .050 in. .063 in. .080 in.	Mill Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized
QUANTITY Attach Sketches of Z- and T- Miters _____ Straight Length _____ Total Miters (Inside: _____ / Outside: _____) _____ Total End Caps (Left: _____ / Right: _____) _____ Total End Terms (Left: _____ / Right: _____) _____ Transition Miters _____ T-Miter _____ Z-Miter _____ Radius _____ Radius to Straight Miter _____ Radius End Cap _____ Vault Welded _____ Vault to Straight Miter Welded _____ Vault End Cap _____ Ridge Miter _____ Valley Miter		ACCESSORY TYPE Welded Metal-Lok	CUSTOMER APPROVAL Approved for Fabrication Approved with Changes Not Approved _____ Authorized Customer Signature Title _____ Date _____	
COLOR _____		Project Location: _____ Customer: _____ Representative: _____		



PermaSnap® Premier Plus

Snap-On Coping
with Intermittent Clips

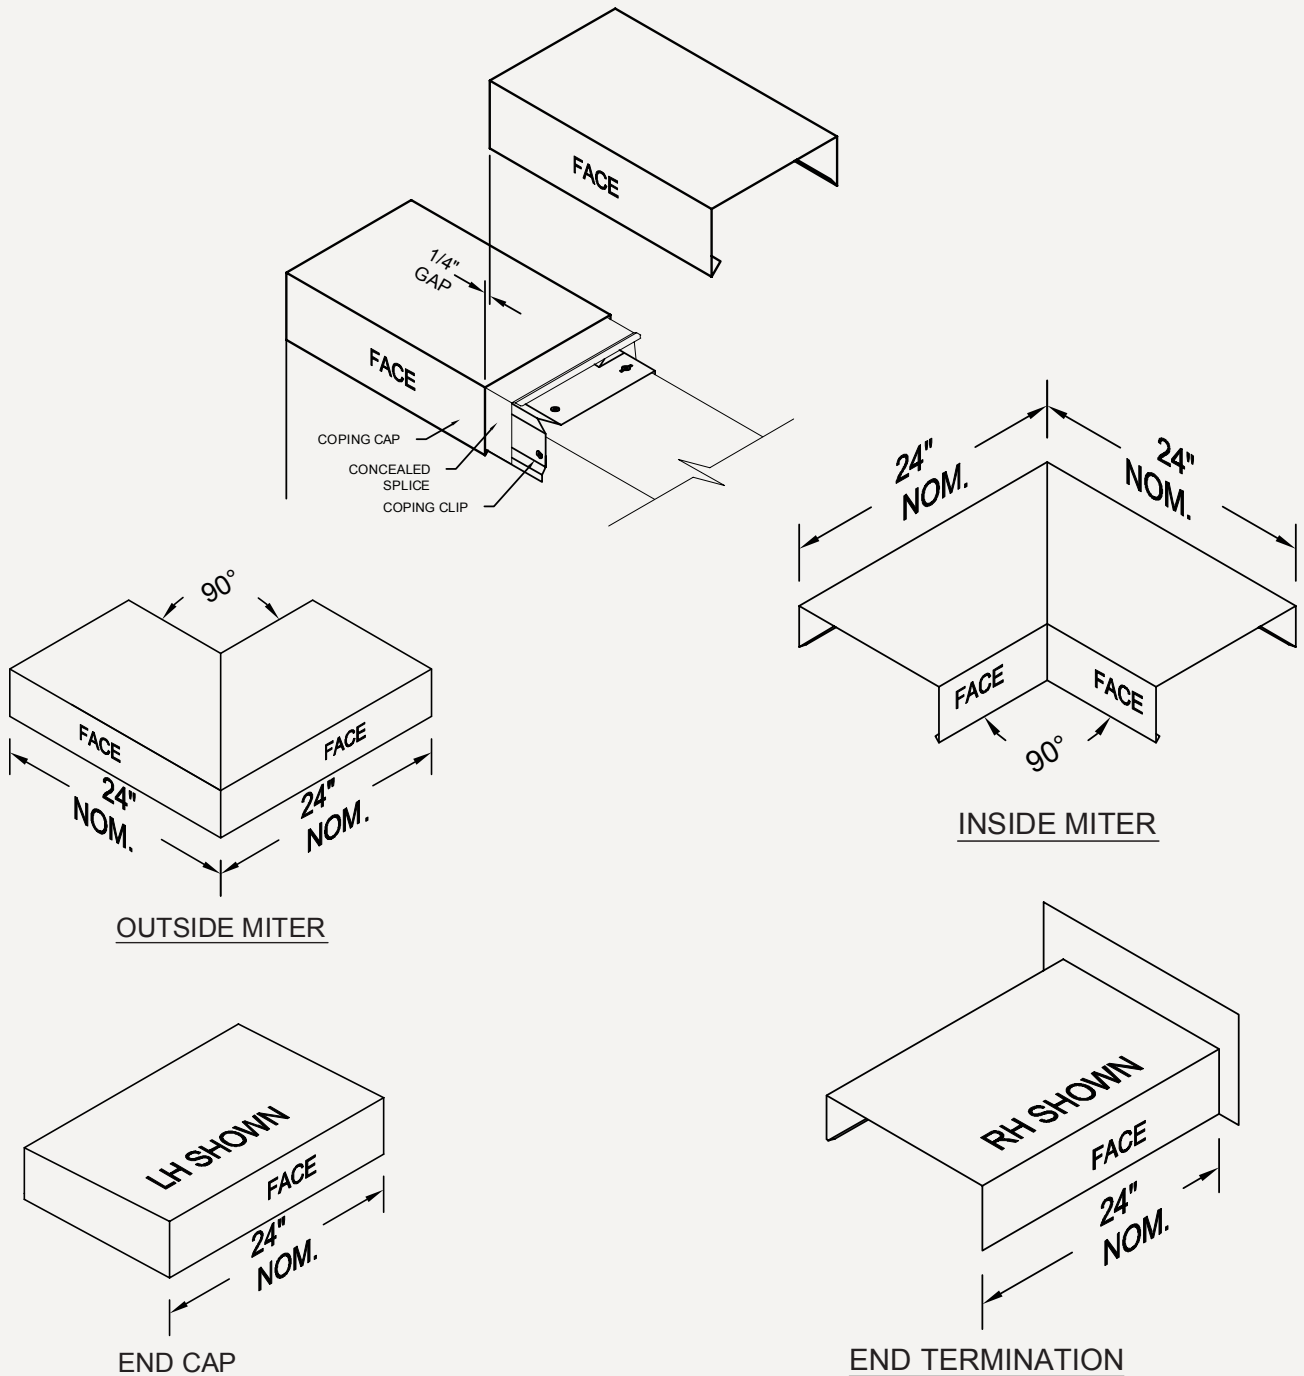

EdgeSystems

4 COMMERCE WAY, ARDEN NC 28704 USA
800-892-9173 828-676-1700 OMGROOFING.COM

Copyright © 2020 OMG, Inc. All rights reserved.

Superior productivity.
Superior performance.

