

Roof Hatches provide convenient, cost efficient rooftop access. They allow for ladder and stair access to the roof from the interior of the building. The Roof Hatches are designed and engineered for use over roof openings and are secured from the base flange to the roof for durability, safety and ease of installation.



- Durable Construction
Galvanized, 14 Gauge Steel, gray primed finish
- Interior locking Feature for Added Security
- Compression Springs & Handle for Assisted Open/Close
- Pre-Drilled holes for simple install of Roof Hatch Safety Rails
- Pre-Assembled Automatic Roof Hatch Opener Available.

Available Sizes	Product ID	Frame ID	Frame OD	Weight
30" x 36"	SPH3036	30" x 36"	37" x 43"	155 lbs.
36" x 36"	SPH3636	36" x 36"	43" x 43"	195 lbs.
30" x 54"	SPH3054	30" x 54"	37" x 61"	233 lbs.
48" x 48"	SPH4848	48" x 48"	55" x 55"	330 lbs.
30" x 96"	SPH3096	30" x 96"	43" x 103"	335 lbs.

Dimensions subject to manufacturer's tolerance of + or - .25". SafePro™ assumes no responsibility for use of void or suspended data.

Product Description: Provide convenient, cost efficient rooftop access, allowing for ladder and stair access to the roof from the interior of the building. The Roof Hatch is designed and engineered for use over roof openings and are secured from the base flange to the roof for durability, safety and ease of installation.

Curb Construction: Shall be 14 gauge (G90) galvanized steel with durable paintable gray primer finish. It shall be 12" in height with a 3-1/2" wide mounting flange with holes for roof attachment.


Cover: Is 14 gauge (G90) galvanized steel with radius corners for safety and shall be fully welded at the corners for watertight construction.

Latching: Interior handle, exterior handle and provisions for an inside padlock.

Hardware: Automatic, hold-open arm with vinyl grip and compression springs encased in telescopic tubes for smooth door operation.

Guide Specification: Provide Roof Hatch (specify model number and options), manufactured by SafePro™. Roof Hatch is fabricated from 14 gauge (G90) galvanized steel on both hatch cover as well as the liner. Provide compression springs encased in zinc-plated telescopic tubes. Furnish an automatic hold-open arm with vinyl grip. For safety and added security, latching shall include both interior and exterior handles with provisions for an inside padlock.

Warranty: 5 year manufacturer's warranty.

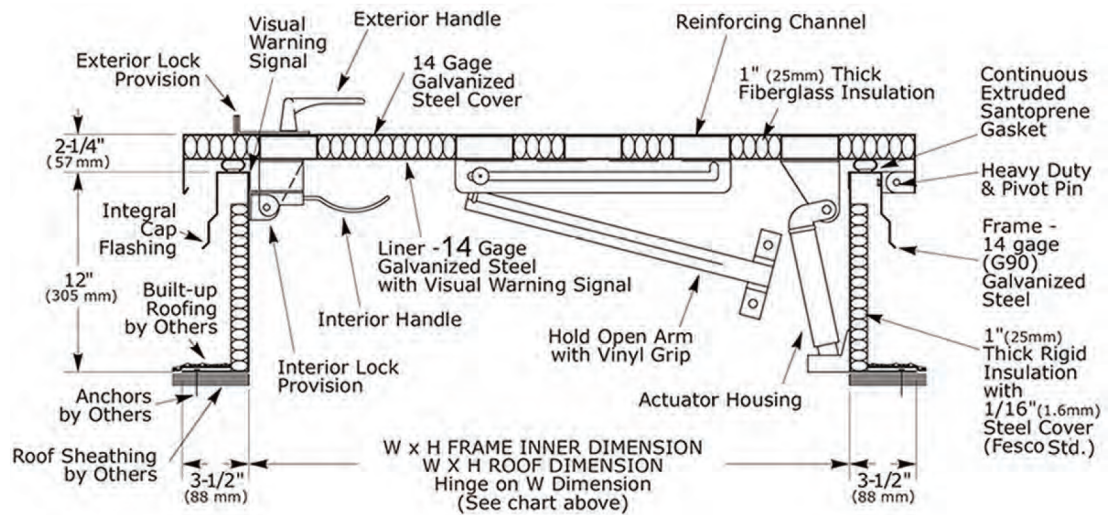

Philadelphia Office

6 Poulson Ave
P.O. Box 156
Essington, PA 19029
Phone: 610-521-3404
Fax: 610-521-4717

Harrisburg Office

7917 Derry St
Suite 106
Harrisburg, PA 17111
Phone: 717-458-5610
Fax: 717-458-5613

Pittsburgh Office

503-5 North Drive
Sewickley, PA 15143
Phone: 412-259-8449
Fax: 412-291-3188