
ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 286 PSF (HORIZONTAL)



PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

<FM> ANSI/SPRI/FM4435/ES-1 TESTED

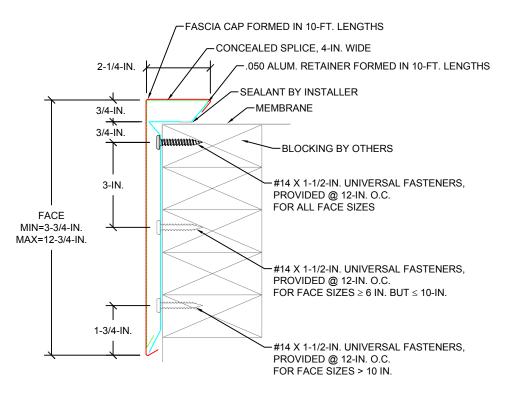

APPLICATIONS SINGLE-PLY MEMBRANES

SIZES: SEE DRAWING

NOTES:

1-REFER TO ROOF MEMBRANE MANUFACTURER FOR THEIR APPROVED INSTALLATION DETAIL.

2-TESTED IN ACCORDANCE WITH

ANSI/SPRI/FM4435/ES-1.

MIAMIDADE COUNTY

Annrovad