


TerminEdge™ Fascia with Formed Galvanized Steel Retainer for Single-Ply.

ORDER SPECIFICATION FORM

ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 381 PSF (HORIZONTAL)

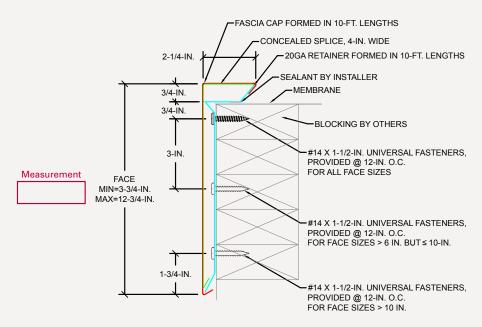


PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPROVALS	COVER MATERIAL	THICKNESS	COVER FINISH
ANSI/SPRI/FM 4435 /ES-1 TESTED APPROVED Florida Product Approval APPROVED Florida Product Approval APPROVED	Aluminum Galvanized Steel Stainless Steel	24Ga. 22Ga. .040 in.	Mill Prefinished Kynar Premium Prefinished Kynar
QUANTITY		.050 in.	Post Finished Kynar
Straight Length	ACCESSORY TYPE	.063 in.	Prefinished Anodized
/ Total Miters (Inside:/ Outside:)	Welded		Post Finished Anodized
/ Total End Caps (Left:/ Right:)	Folded		
Total End Terms (Left: / Right:)	CUSTOMER APPROVAL Approved for Fabrication Approved with Changes Not Approved Authorized Customer Signature		
Radius Notched			
Radius to Straight Miter Notched			
Radius End Cap			
Vault Welded			
Vault to Straight Miter Welded			
Vault End Cap			
Z-Miter			
Ridge Miter			
Valley Miter	Title Date Job Name:		
Sumps			
Spillouts	Project Location:		
FACE HEIGHT COLOR	- Customer:		
	Representative:		



TerminEdge™ Fascia with Formed Galvanized Steel Retainer for Single-Ply.

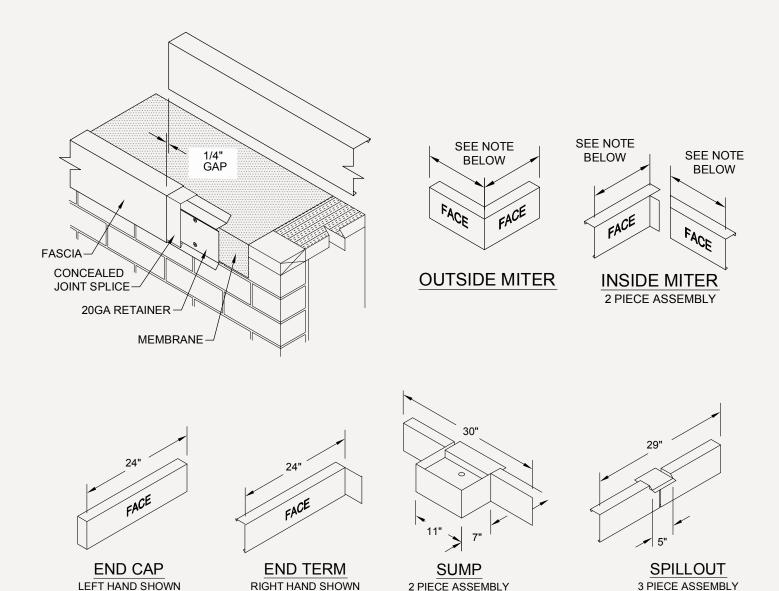

Standard fascia miter leg lengths: 12" nominal

Standard fascia miter angle is 90°

For special miter requirements, attach sketches or consult manufacturer for assistance.



4 COMMERCE WAY, ARDEN NC 28704 USA 800.892.9173 828.676.1700 OMGROOFING.COM



Superior productivity. Superior performance.





