

Cobra Cart™

Mobile Fall Arrest Systems

Meets OSHA Requirements

1910.29(b) and 1926.502(b)

With multiple workers on a job site requiring personal fall arrest systems, the Cobra Cart™ is the solution. Cobra Cart™ offers workers OSHA compliant anchor points when doing leading-edge work.

No substrate penetration is required as the cart follows workflow movement. With anchor points for 2 people for fall restraint and up to 3 for fall arrest, Cobra Cart™ provides up to a 45-degree work zone in either direction of the anchor point. When it is time to reposition, simply use the built-in handle to move.

For fall arrest, the Cobra Cart™ engagement claw quickly penetrates the substrate to secure the cart. Utilize the optional rescue winch for recovery. The optional 7.5 cu ft. poly storage box keeps your lifelines and harnesses organized. Open area allows for mounting of a generator, compressor, or toolbox. Convenient fork pockets on deck simplify transport and lifting.

Built "roofer" tough with powder coated surfaces for durability and corrosion resistance. The flat-free tires allow easy repositioning. The integrated ballast is positioned under the deck out of the way.



COBRA CART™ FEATURES:

- Provides fall restraint for two and fall arrest for three workers.
- Heavy duty cart with flat free tires moves easily across uneven surfaces to follow workflow.
- Cobra Cart™ claw penetrates the surface quickly to arrest a fall stopping cart movement.
- Large open deck provides space for generators, compressors, or storage box.



Why Choose Garlock?


- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- 100+ Years of Industry Experience
- Full Passive Fall Protection Portfolio
- Custom Engineered Products Available



Features



Integrated Handle/Brake

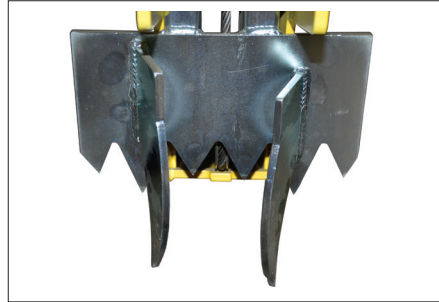

Engagement Claw



Cobra Cart™ Anchor Points
yellow = fall restraint
green = fall arrest

Specifications

Length (with handle)	102"
Width	59"
Height	36"
Weight	1100 lbs.
Fall Arrest Rating	3 people*
Fall Restraint Rating	2 people
Tires	18 x 8.50 flat-free
Deck Space Front	22" x 40"
Deck Space Rear	26" x 40"

* on 4000PSI concrete slab rated for 1 person only

Options



Storage Box



Rescue Winch
Aid in retrieval of fallen workers.



Fall Alert
Warn other workers a fall has occurred.



P : 877.791.4446
E : info@garlocksafety.com
GARLOCKSAFETY.COM

Address:
2601 Niagara Ln N.
Plymouth, MN 55447